


FIXED DIRECT GAS FIRED AIR HEATERS

CF 75 SPARK



CF 75 SPARK

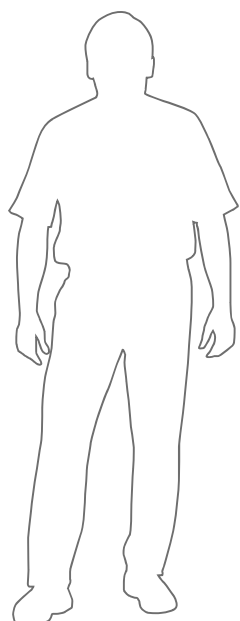

- Designed for indoor and outdoor use
- Can be placed on the floor or hung from a ceiling
- Galvanised steel combustion chamber
- Reliable twin spark ignition
- Natural gas or LP gas burner
- High efficiency heat exchanger
- Overheat thermostat
- Closed motor to assure safety and dependability even in harsh environments
- Galvanised steel body

Included in the box



Diverter



LPG to NATURAL GAS kit

Optional accessories



Analogue thermostat TH5 with cable
3m - **4150.109**
10m - **4150.112**



Digital thermostat THD with cable
5m - **4150.133**
10m - **4150.134**



Kit for outdoors
Galvanised - **4015.164**



Brackets
Galvanised - **4230.120**

Specifications	Units	CF 75 SPARK
Heating power	kW	75
	Btu/h	255,900
	kcal/h	64,500
Air flow	m ³ /h	2,100
Thermostat control		Optional
Fuel consumption (LPG)	m ³ /h	2.3
Fuel consumption (natural gas)	m ³ /h	8.0
Electric power	kW	0.5
Power supply	V/Hz	220-240/1ph/50
Rated current	A	2.8
Product size (l x w x h)	mm	788 x 464 x 719
Box size (l x w x h)	mm	825 x 515 x 780
Net/gross weight	kg	57/61
Pallet	pcs	4