


INFRARED OIL FIRED HEATERS HYBRID: 14V, 110V AND 220V DC 61




Ventilation of the room is necessary to prevent a deficiency of oxygen.

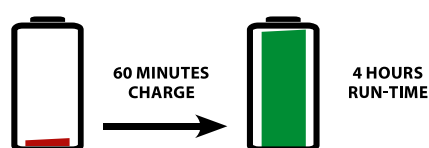

Included in the box




Optional accessories

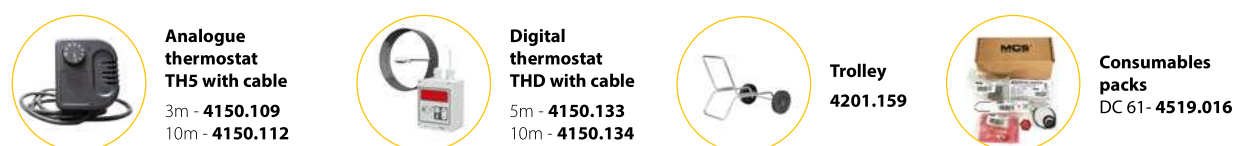

Specifications	Units	DC 61	T Ambient 20°C	0.5m	1m	1.5m
Heating power	kW	17	DC 61	110°C	50°C	20°C
	Btu/h	58,000				
	kcal/h	14,600				
Fuel consumption	l/h	1.6				
Fuel autonomy	h	7				
Thermostat control		Analogue or digital				
Electric power	kW	0.2				
Power supply	V/Hz	110-240/1ph/50				
Rated current	A	1				
Tank capacity	l	11				
Product size (l x w x h)	mm	560 x 345 x 575				
Box size (l x w x h)	mm	680 x 380 x 580				
Net/gross weight	kg	19/21				
Pallet	pcs	12				



- Can be plugged into the mains (110-240 V) or can be used cordless with lithium battery (14 V)
- 14 V only the highest electrical safety
- Equipped with Master Lithium Battery BAT6
- On board power adapter from 110 V to 220 V AC included
- Low noise
- Infrared heating (short wave)
- No air flow
- Electronic flame control with photocell
- Post-ventilation
- Standard oil level indicator
- ILME socket for remote thermostat: analogue or digital
- Suction filter and inlet filter
- Snorkel
- Overheat thermostat
- Anti-tilt switch

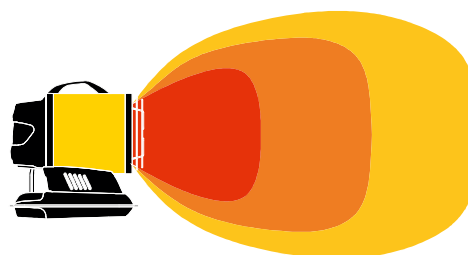

Hybrid means that you can use the battery and the power cable.