DANTHERMGROUP



E36202-48202-56002-60002

Destratifiers


Master destratifiers can be used during summer and winter to improve the climate in the room.



Master E36202



Master E Destratifier factory ceiling

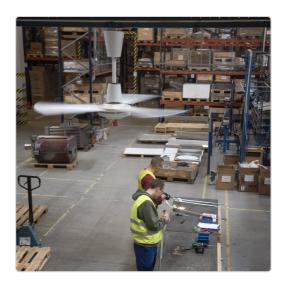

Master E Destratifier production



Master E Destratifier workshop

Key features

| \bigcirc | The most powerful ceiling fans available on the market |
|-------------------|---|
| \bigcirc | Working area up to 14 meters |
| $\langle \rangle$ | Heavy duty construction for many years of hassle-free use |

The aerodynamic shape moves moves large volumes of air

Balanced motor and blades for vibration-free operation

The motor is protected from thermal overload as it is equipped with thermal protection and automatic reset

Can work in harsh professional conditions


Winter destratification

The hot air flows upstream. The Master ceiling fan pushes heat back down to the floor. The resulting energy saving is about 30%.


Summer ventilation

The Master ceiling fan creates an air flow which helps moisture evaporate from the skin, with an improvement of about 4°C on the perceived temperature. The fan supports the air-conditioning allowing the air to feel 23°C even when the thermostat shows 27°. It is perfect for humid environments and eliminates mould and dust.

Side view of an installation

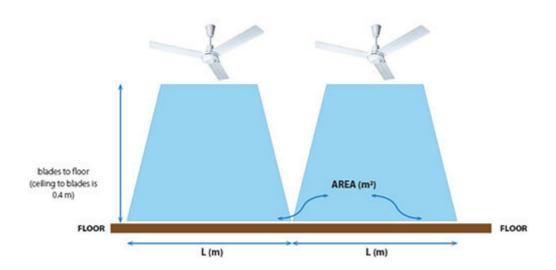

Example of distribution of the destratifiers in a factory

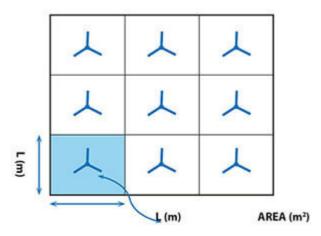

Product specifications

| Specifications | Units | E36202 |
|----------------------------------|---------|-----------------|
| Air flow | m³/h | 19,900 |
| Maximum area in destratification | m² | 140 |
| Turning diameter | mm/inch | 900/36" |
| Fan type | | Axial-Blades |
| Colour/number of blades | | White/3 |
| Power supply | V/Hz | 230/1ph/50/60 |
| Power consumption | W | 71 |
| Rated current | А | 0.31 |
| Max. speed | rpm | 325 |
| Max. working height | m | 4 |
| Product size | Ømm | 900 x h 600 |
| Box size (I x w x h) | mm | 660 x 250 x 250 |
| Net/gross weight | kg | 7.7/9 |
| Pallet | pcs | 45 |

| 2021 | E36202-48202-56002-60002 | |
|----------------------------------|--------------------------|-----------------|
| Specifications | Units | E48202 |
| Air flow | m³/h | 32,100 |
| Maximum area in destratification | m² | 180 |
| Turning diameter | mm/inch | 1,200/48" |
| Fan type | | Axial-Blades |
| Colour/number of blades | | White/3 |
| Power supply | V/Hz | 230/1ph/50/60 |
| Power consumption | W | 105 |
| Rated current | А | 0.52 |
| Max. speed | rpm | 300 |
| Max. working height | m | 5 |
| Product size | Ømm | 1200 x h 600 |
| Box size (I x w x h) | mm | 660 x 250 x 250 |
| Net/gross weight | kg | 9.3/11 |
| Pallet | pcs | 45 |
| Specifications | Units | E56002 |
| Air flow | m³/h | 41,600 |
| Maximum area in destratification | m² | 350 |
| Turning diameter | mm/inch | 1,400/56" |
| Fan type | | Axial-Blades |
| Colour/number of blades | | White/3 |
| Power supply | V/Hz | 230/1ph/50/60 |
| Power consumption | W | 110 |
| Rated current | А | 0.55 |

| Specifications | Units | E56002 |
|----------------------------------|---------|-----------------|
| Max. speed | rpm | 290 |
| Max. working height | m | 12 |
| Product size | Ømm | 1400 x h 600 |
| Box size (I x w x h) | mm | 660 x 250 x 250 |
| Net/gross weight | kg | 9.8/12 |
| Pallet | pcs | 45 |
| Specifications | Units | E60002 |
| Air flow | m³/h | 66,200 |
| Maximum area in destratification | m² | 470 |
| Turning diameter | mm/inch | 1,500/60" |
| Fan type | | Axial-Blades |
| Colour/number of blades | | White/3 |
| Power supply | V/Hz | 230/1ph/50/60 |
| Power consumption | W | 120 |
| Rated current | А | 0.6 |
| Max. speed | rpm | 300 |
| Max. working height | m | 14 |
| Product size | Ømm | 1500 x h 650 |
| Box size (I x w x h) | mm | 710 x 280 x 280 |
| Net/gross weight | kg | 12.8/ 14.5 |
| Pallet | pcs | 32 |