INFRARED OIL FIRED HEATERS HYBRID: 14V, 110V AND 220V

# DC 61

DIESEL OIL

Ventilation of the room is necessary to prevent a deficiency of oxygen.

ACCU LITHIUM

PATENT

**DC 61**

- Can be plugged into the mains (110-240 V) or can be used cordless with lithium battery (14 V)
- 14 V only the highest electrical safety
- Equipped with Master Lithium Battery BAT6
- On board power adapter from 110 V to 220 V AC included
- Low noise
- Infrared heating (short wave)
- No air flow
- Electronic flame control with photocell
- Post-ventilation
- Standard oil level indicator
- ILME socket for remote thermostat: analogue or digital
- Suction filter and inlet filter
- Snorkel
- Overheat thermostat
- Anti-tilt switch

## Included in the box

**Power cord**

**Master battery pack charger**
- **4260.270**

**6Ah Master lithium battery pack: 4 hours run-time. More than 1000 recharges.**
- **4260.268**

## Optional accessories

**Analogue thermostat TH5 with cable**
3m - **4150.109**
10m - **4150.112**

**Digital thermostat THD with cable**
5m - **4150.133**
10m - **4150.134**

**Trolley**
**4201.159**

**Consumables packs**
DC 61- **4519.016**

| Specifications | Units | DC 61 |
|---|---|---|
| Heating power | kW | 17 |
| | Btu/h | 58,000 |
| | kcal/h | 14,600 |
| Fuel consumption | l/h | 1.6 |
| Fuel autonomy | h | 7 |
| Thermostat control | | Analogue or digital |
| Electric power | kW | 0.2 |
| Power supply | V/Hz | 110-240/1ph/50 |
| Rated current | A | 1 |
| Tank capacity | l | 11 |
| Product size (l x w x h) | mm | 560 x 345 x 575 |
| Box size (l x w x h) | mm | 680 x 380 x 580 |
| Net/gross weight | kg | 19/21 |
| Pallet | pcs | 12 |

| T Ambient 20°C | 0.5m | 1m | 1.5m |
|---|---|---|---|
| **DC 61** | 110°C | 50°C | 20°C |

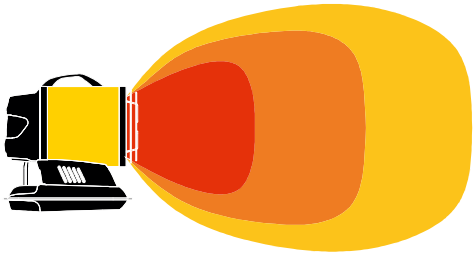

Hybrid means that you can use the battery and the power cable.



MASTER CLIMATE SOLUTIONS