INFRARED OIL FIRED HEATERS WITH MASTER BURNER

XL 61

DIESEL OIL

Ventilation of the room is necessary to prevent a deficiency of oxygen.

XL 61

PATENT

DISPLAY AND SOCKET FOR REMOTE THERMOSTAT

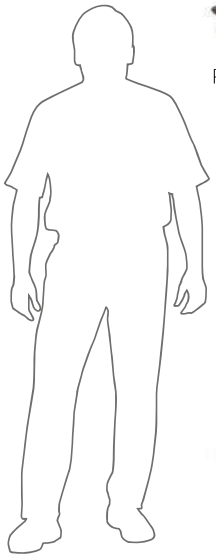

XL 61 WITH TROLLEY

- Low noise
- Infrared heating (short wave)
- No air flow
- Electronic flame control with photocell
- Post-ventilation
- Standard oil level indicator
- ILME socket for remote thermostat: analogue or digital
- Suction filter and inlet filter
- Snorkel
- Overheat thermostat
- Anti-tilt switch

Optional accessories

Analogue thermostat TH5 with cable
3m - **4150.109**
10m - **4150.112**

Digital thermostat THD with cable
5m - **4150.133**
10m - **4150.134**

Trolley
4201.159

Consumables packs
XL 61- **4519.016**

Specifications	Units	XL 61
Heating power	kW	17
	Btu/h	58,000
	kcal/h	14,600
Fuel consumption	kg/h	1.35
Fuel autonomy	h	7
Thermostat control		Analogue or digital
Electric power	kW	0.2
Power supply	V/Hz	220-240/1ph/50
Rated current	A	0.85
Tank capacity	l	11
Product size (l x w x h)	mm	560 x 345 x 575
Box size (l x w x h)	mm	600 x 380 x 580
Net/gross weight	kg	19/21
Pallet	pcs	12
110 V		Available
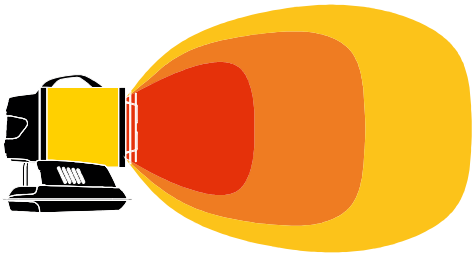
T Ambient 20°C	0.5m	1m	1.5m
XL 61	110°C	50°C	20°C