

TC 220 IF

INDUSTRIAL VACUUM CLEANER WITH FLOW REVERSAL FOR MAINTENANCE OF MACHINE TOOLS AND CNC

Filter category:



FEATURES



Separation and recovery of oil and chips for machine tool maintenance
Easy to transport

Complete painted steel construction

Superweb 3D Kit, sieve grid basket for chip separation and polypropylene filter for liquids

Reversible flow liquid drain or submersible pump (with continuous suction and discharge)

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

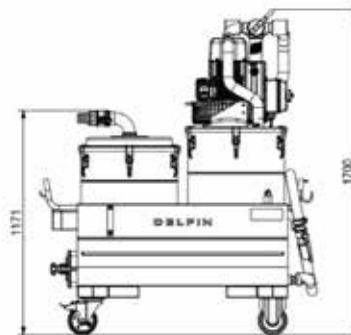

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

TECHNICAL DATA

		TC220IF-001
Voltage	V	400
Power	kW	3.45
Frequency	Hz	50
Current draw	A	6.9
Suction inlet diameter	mm	50
Noise level	dB(A)	78
Dimensions	cm	150x72x175h
Weight	kg	185
Electrical protection	IP	65
Liquids capacity	L.	220
Solids capacity	L	40
Discharge capacity		200
Maximum vacuum	mmH2O	3000
Continuous waterlift	mmH2O	2600
Maximum air flow	m³/h	318
Motor Type		Three-phase Turbine
Primary filter		3D Superweb
Primary filter diameter	mm	500
Filter class (IEC 60335-2-69) primary filter		Polypropylene
Filtration	µm	20
Discharge system		Flow reversal
Floating device		Mechanical

 OPTIONAL

Code	Description
PPL300	PPL oil filter kit up to 300 microns (in suction)
OWR	Oil & water repellent cartridge



MACHINE CODE	DESCRIPTION
TC220IF-001	TECNOIL 220 THREE-PHASE 3KW FLOW REVERSAL

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.