

WALL-MOUNTED DEHUMIDIFIERS

DH 15




DH 15

The DH 15 wall-mounted dehumidifier has a compact design for installation in small areas, making it an ideal solution for stairwells, corridors and changing rooms. Being fully self contained, with tamper proof controls is perfect for public buildings such as schools, museums and galleries.



- Compact design for installation in small areas
- Self contained with fully automatic operation
- Integral humidistat
- Tamper proof controls
- Epoxy polyester painted zintec steel cabinet
- Hot gas defrost for low temperature operation
- Air filter

Performance data

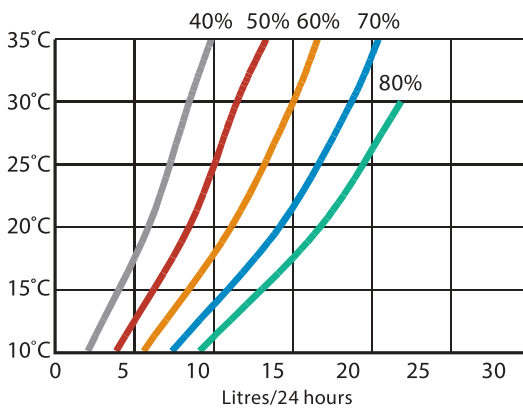

Options

- Through-the-wall version

Specifications	Units	DH 15AX
Operating temperature range	°C	0-35
Dehumidification @ 30°C/60% RH	l/24h	15
Heat recovered to air @ 30°C/60% RH	kW	0.9
Air flow	m³/h	225
External static pressure	Pa	0
Sound pressure level @ 3m	dB(A)	53
Refrigerant		R407c
Power supply	V/Hz	230/1ph/50
Nominal power consumption	kW	0.43
FLA	A	3.8
Maximum supply fuse	A	10
LRA (compressor start)	A	18
Product size (w x d x h)	mm	825 x 363 x 320
Weight	kg	33
Condensate drain size (flexible plastic hose)	mm ID	10