

# WALL-MOUNTED DEHUMIDIFIERS

## DH 30




**DH 30**

The DH 30 is a high performance, low cost wall-mounted dehumidifier with integrated air heating option available. Designed to treat spaces, such as garages, changing rooms and archives, it maintains a comfortable humidity, minimises condensation and keeps heating costs to a minimum. For drying rooms it is a great compact solution.



- Self contained with fully automatic operation
- Integral humidistat
- Polyester coated evaporator and condenser
- Powder coated galvanised steel cabinet
- Hot gas defrost for low temperature operation
- Quiet centrifugal fans
- Remote humidistat and on/off function

### Performance data

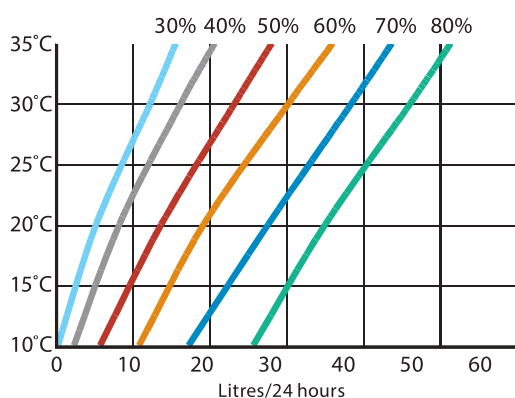

### Options

- Through-the-wall version
- Electric air heater
- Floor stand kit

Specifications	Units	DH 30AX	DH 30AXP
Operating temperature range	°C	0-35	0-35
Dehumidification @ 30°C/60% RH	l/24h	30	30
Heat recovered to air @ 30°C/60% RH	kW	1.9	1.9
Air flow	m <sup>3</sup> /h	700	700
External static pressure	Pa	0	0
Sound pressure level @ 3m	dB(A)	52	52
Refrigerant		R407c	R407c
Power supply	V/Hz	230/1ph/50	230/1ph/50
Dehumidifier power input	kW	0.75	0.75
FLA	A	4.4	12.7
Maximum supply fuse	A	10	20
LRA (compressor start)	A	15.8	15.8
Heater type		Optional LPHW	Standard Electric
Heat output	kW	3.0	2.0
Flow rate	l/min	5.0	-
Product size (w x d x h)	mm	782 x 270 x 648	782 x 270 x 648
Weight	kg	40	40
Condensate drain size (flexible plastic hose)	mm ID	16	16