


Food hoses

- » Interior synthetic rubber. Very temperature-resistant. Resistant to usual detergents.
- » Surface special synthetic rubber. Non marking (soot free). Resistant to animal fats.
- » **Field of application:** slaughterhouses, fishing, bakeries etc. Not suitable for swimming baths, poultry fat, standard and industrial cleaning applications.

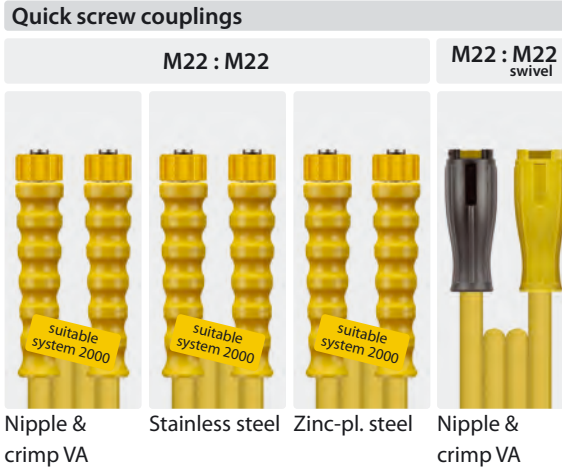

Other lengths or connections are available on request.

Hoses with double wire braid and wrapped cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SC	8	400 bar	150 °C	10 m	349 100 410 7	349 100 410 9	349 100 410	349 101 121 07
				15 m	349 100 415 7	349 100 415 9	349 100 415	349 101 121 57
				20 m	349 100 420 7	349 100 420 9	349 100 420	349 101 122 07
2SC	10	400 bar	150 °C	10 m	381 100 410 7	381 100 410 9	381 100 410	
				15 m	381 100 415 7	381 100 415 9	381 100 415	
				20 m	381 100 420 7	381 100 420 9	381 100 420	

All fittings are made out of zinc-plated steel. The hoses are also available with stainless steel fittings.
 Please be so kind as to state the following on your order: R+M Nr. plus number:
 7 = plug and crimp stainless steel 8 = plug stainless steel 9 = plug, crimp and connection stainless steel

Symbols DN nominal diameter P pressure °C temperature ↔ length TYP type BP burst pressure VPE packing unit