

## High-pressure hoses for existing systems



Dust protection seal o-ring




R+M Nr.	PU
050 000 110	1 piece
791 932 401	100 pieces

### Quick screw couplings : quick screw couplings

### QSC : plug swivel

#### TR22 : TR22 swivel

#### TR22 swivel : 11 swivel

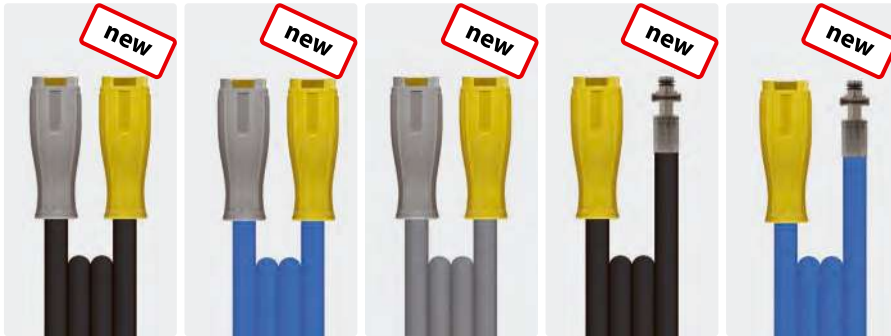

### Hoses with single wire braid and wrapped cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
1SN	6	250 bar	150 °C	10 m	330 117 242 10	331 117 242 10	332 117 242 10	330 116 782 10	331 116 782 10
				15 m	330 117 242 15	331 117 242 15	332 117 242 15	330 116 782 15	331 116 782 15
				20 m	330 117 242 20	331 117 242 20	332 117 242 20	330 116 782 20	331 116 782 20
1SN	8	210 bar	150 °C	10 m	340 117 242 10	341 117 242 10	342 117 242 10		341 116 782 10
				15 m	340 117 242 15	341 117 242 15	342 117 242 15		341 116 782 15
				20 m	340 117 242 20	341 117 242 20	342 117 242 20		341 116 782 20
1SN	8	315 bar	150 °C	10 m	343 117 242 10			343 116 782 10	
				15 m	343 117 242 15			343 116 782 15	
				20 m	343 117 242 20			343 116 782 20	
1SN	10	210 bar	150 °C	10 m	350 117 242 10	351 117 242 10	352 117 242 10		
				25 m	350 117 242 25	351 117 242 25	352 117 242 25		
				40 m	350 117 242 40	351 117 242 40	352 117 242 40		

### Hoses with double wire braid and smooth cover

TYP	DN	P	°C	↔	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.	R+M Nr.
2SN	8	400 bar	150 °C	1.2 m	345 617 242 012				
				10 m	345 617 242 10	346 617 242 10	347 617 242 10	345 616 782 10	
				15 m	345 617 242 15	346 617 242 15	347 617 242 15	345 616 782 15	
				20 m	345 617 242 20	346 617 242 20	347 617 242 20	345 616 782 20	
				30 m	345 617 242 30	346 617 242 30	347 617 242 30	345 616 782 30	
40 m	345 617 242 40	346 617 242 40	347 617 242 40	345 616 782 40					