


easywash365+ car wash ceiling booms with suspension

easywash365+ standard with spring



Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors.  
Axle 2-ball bearings and permanently lubricated.  
Max. 275 bar / 90 °C.

R+M Nr.	↔	Ⓞ	Ⓢ	Ⓜ
109 766 972	1,750 mm	1/4" F	1/4" M	8.0 kg

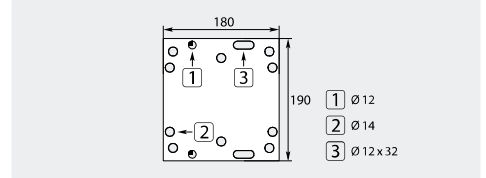


easywash365+ car wash ceiling boom-Z with spring








Stainless steel. Ready for installation with two integrated swivels and professional high pressure hose with spring and integrated hose bend restrictors. Axle 2-ball bearings and permanently lubricated.  
Especially designed for using two booms side by side.  
Max. 275 bar / 90 °C

R+M Nr.	↔	Ⓞ	Ⓢ	Ⓜ
109 765 978	1,550 mm	1/4" F	1/4" M	8.0 kg

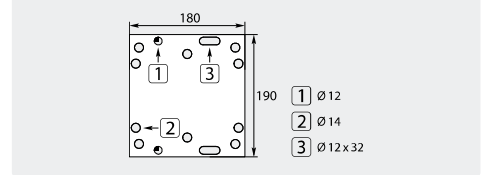

Mounting example for ceiling boom-Z

- A = 4,600 mm
- B = 900 mm
- C = 1,500 mm
- D = 750 mm
- L = 1,550 mm

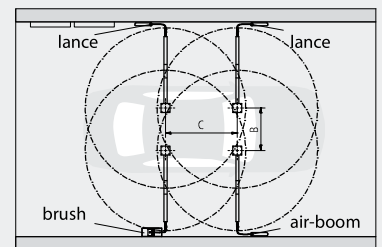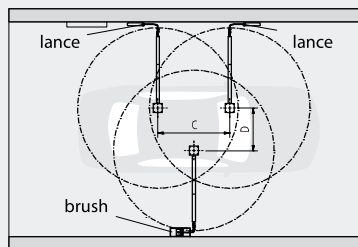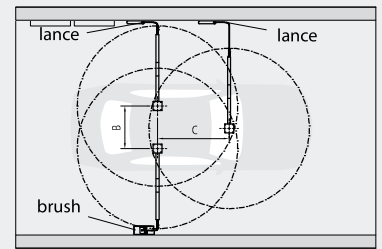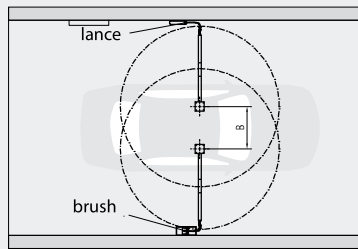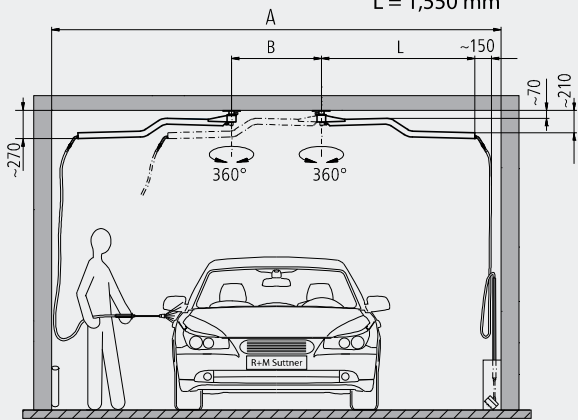

Symbols Ⓞ inlet Ⓢ outlet Ⓜ weight ↔ length